

地址：中国 杭州余杭经济开发区宏达路168号
ADD: No.168 Hongda Road, Yuhang Eco-Development Area,
Hangzhou, P.R. China

电话(Tel):0571-86099898 传真(Fax):0571-86992133 网址(Web):www.xiolift.com



服务热线 SERVICE LINE

400-826-9998

杭州总店

地址：浙江省杭州市江干区景昙路9号西子国际A座
西奥电梯体验馆
电话：0571-81028788

绍兴越城门店

地址：浙江省绍兴市越城区金德隆文创园6幢120
西奥电梯体验馆
电话：13616553064

绍兴上虞门店

地址：浙江省绍兴市上虞区百官街道峰山南路660-662号
西奥电梯体验馆
电话：0575-82160661

宁波门店

地址：浙江省宁波市鄞州区星安路77号
西奥家用电梯体验馆
电话：15557002393

金华门店

地址：浙江省金华市婺城区八一南街1970号西奥电梯
电话：0579-82583617

临安门店

地址：浙江省杭州市临安区石镜街1189号
电话：15869001150

余姚门店

地址：浙江省宁波市余姚市远东路216号
电话：18957886599

海宁门店

地址：浙江省嘉兴市海宁市海昌南路916号
电话：18268348707

广州门店

地址：广东省广州市天河区汇彩路10号102铺
电话：020-85656896

中山门店

地址：广东省中山市板芙镇深湾丰成创意园
电话：13680256686

福州红星美凯龙店

地址：福建省福州市仓山区红星美凯龙一楼A8032-2
电话：18060855100

福州门店

地址：福建省福州市仓山区金岩路157号碧全产业园
2栋5楼
电话：0591-88302575

上海门店

地址：上海市闵行区莘庄镇秀文路898号
西子国际中心1号楼1楼西奥电梯展厅
电话：13917918452

重庆门店

地址：重庆市渝北区礼勤路与礼慈路交叉口南40米
西奥城市展厅
电话：13883168666

武汉门店

地址：湖北省武汉市盘龙城经开区卓尔企业总部J9栋
电话：027-85711515

成都门店

地址：四川省成都市剑南大道南段1166号
美行中心2804
电话：185938481

郑州门店

地址：河南省郑州市商都路通泰路京东家装南门一楼
西奥电梯展厅
电话：0371-88881661

沈阳门店

地址：辽宁省沈阳市浑南区国际软件园B区B16
电话：15041240545

南宁门店

地址：广西省南宁市西乡塘区安吉大道47-2号南宁
大商汇商贸物流中心A地块1号楼121号
电话：18607718299

南昌门店

地址：江西省南昌市青云谱区建设路288号
巨汇家居广场6楼西奥电梯体验馆
电话：17707088131

贵阳门店

地址：贵州省贵阳市观山湖区阅山湖C-181-1/30
电话：0851-86867777

长沙门店

地址：湖南省长沙市开福区秀峰街道开福大道与兴联路
交汇处香江红星家具广场一期B2-1栋2023房
电话：15111137595

常德门店

地址：湖南省常德市武陵区柳叶大道紫御华庭6栋
101门面
电话：0736-7202088

株洲门店

地址：湖南省株洲市天元区黄河南路1号天泉一品
26栋109、209号-西奥电梯
电话：18873350223

无锡门店

地址：江苏省无锡市梁溪区金城路730号
西奥电梯无锡城市展厅
电话：0510-88555887

盐城门店

地址：江苏省盐城市亭湖区希望大道58号绿地商务城
花漾国际公寓11号楼105门面（西奥电梯体验馆）
电话：18762393785

淮安展厅

地址：江苏省淮安市清河区水渡口大道106号
白鹭湖璟园105-39门面
电话：13952308281

南通门店

地址：江苏省南通市通州区金霞路911号
电话：13376139600

昆山门店

地址：江苏省苏州市昆山市同丰西路817-1号
电话：0512-57333289

常州门店

地址：江苏省常州市天宁区恒生科技园1-3商铺
电话：0519-85616558

张家港门店

地址：江苏省苏州市张家港市九洲独立馆12号馆
电话：0512-67775039

青岛门店

地址：山东省青岛市崂山区高科园装饰城1号馆A46
西奥电梯（商场一楼西南）
电话：15553200388

烟威门店

地址：山东省烟台市芝罘区兴裕路3号国金家居博览中心
1楼1069-1号
电话：0535-3402656

潍坊门店

地址：山东省潍坊市坊子新区泰华城北门西行800米
西奥电梯展厅
电话：18763671616

XO-SIND

开启馨动生活

家用电梯系列



HANGZHOU XIO LIFT CO.,LTD.

杭州西奥电梯有限公司版权(C)所有
本宣传册中的产品技术参数、规格及图形反映了截稿时止(见封底版本号)电梯型号的技术特点及配置情况,我们保留随时改变产品技术参数、选型和颜色的权利。
本宣传册只提供一般信息,并不作为合同文件,具体配置参数以正式合同约定为准。

HANGZHOU XIO LIFT CO.,LTD. All right reserved

The technical parameters, specifications and graphics of this product in this brochure reflect the technical characteristics and configuration of the elevator model when the deadline is closed(see the back cover version number). We reserve the right to change the product's technical parameters, selection and color at any time. This brochure only provides general information, not as a contract document, the specific configuration parameters to the formal contracts shall prevail.

版本号: 2022.03A
印刷号:

开启馨动生活

BEGIN YOUR SWEET LIFE

XO-SIND家用电梯, 先进钢带曳引技术, 卓尔不凡的极致品质, 彰显您的尊贵地位, 开启更温暖舒适的“馨动”生活。

XO-SIND household elevator, with advanced steel belt traction technology and outstanding ultimate quality, demonstrates your noble status and opens a warmer and more comfortable "sweet" life.

创新， 成就非凡品质

Innovation Leads to
Excellence



钢带曳引

Steel Belt Traction

先进的钢带曳引介质，采用高分子聚氨酯包裹钢芯，有效防止钢芯磨损，寿命可达传统钢丝绳的3倍。

The advanced steel belt traction medium adopts high molecular polyurethane to wrap the steel core, which can effectively prevent the wear of the steel core, and the service life can reach three times that of the traditional steel wire rope.



无油设计

Oil Free Design

聚氨酯层代替油浸麻芯，无需润滑油，杜绝井道污染，同时采用无油导轨，进一步提升井道洁净度。

The polyurethane layer replaces the oil immersed hemp core without lubricating oil to eliminate the pollution of the shaft. At the same time, the oil-free guide rail is adopted to further improve the cleanliness of the shaft.



稳定结构

Stable structure

曳引机采用长轴双支撑设计，受力更均匀，运行更稳定。

The traction machine adopts long shaft double support design, which makes the force more uniform and the operation more stable.



匠心工艺

Craftsmanship

曳引轮表面采用磷化、喷丸、镀硬铬等精加工工艺，表面精度提升4-8倍，大幅提升运行平稳性。

The traction wheel surface adopts phosphating, shot peening, hard chromium plating and other finishing processes, which improves the surface accuracy by 4-8 times and greatly improves the running stability.

静，是一种境界

The Extreme Quiet

消音设计

Silence Design

钢带的聚氨酯表面与曳引机完美贴合，避免金属间摩擦的噪音，噪音较国标降低15%。

The polyurethane surface of the steel belt fits perfectly with the traction machine to avoid the noise of metal friction, which is 15% lower than the national standard.

尖端科技

Cutting-edge Technology

钢带曳引机采用内置式碟型制动器，所需制动力矩更小，抱闸噪音较传统主机降低10%以上。

The steel belt traction machine adopts built-in disc brake, which requires less braking torque and reduces the holding brake noise by more than 10% compared with the traditional host.



图中轿厢型号：XO-Z2121



定制多彩生活


Customize Colorful Life

个性化定制铝型材井道


Personalized Aluminium Profile Shaft

缤纷色彩选择

Numerous colors choice



RAL1035



RAL9004



RAL7047

玻璃创新设计

Innovative design of glass



透明夹胶玻璃
Transparent laminated glass



透明安全玻璃
Transparent safety glass



蓝星灰夹胶玻璃
Blue Star gray laminated glass



蓝星灰安全玻璃
Blue Star gray safety glass

Transparent laminated glass



智慧科技 守护家人

Intelligent Technology
Security Escort

物联网 (选配)

Internet of Things (Optional)

可配备物联网功能，24小时全天候服务，智能监控电梯运行状态，提前发现潜在隐患，定向维护。

It can be equipped with Internet of things function, 24-hour all-weather service, intelligent monitoring of elevator operation status, early detection of potential hidden dangers and directional maintenance.

儿童锁 (选配)

Child Safety Lock (Optional)

先按解锁按钮才能使用外召，确保儿童在有监护人陪同的情况下安全乘梯。

Press the unlock button first to use the external call, so as to ensure that children can ride the ladder safely accompanied by a guardian.

语音呼梯 (选配)

Voice Call (Optional)

在轿厢外呼唤想去的楼层，自动登记目的层指令，全程无需接触。

Call the floor you want to go outside the lift car and automatically register the instruction of the destination floor without contact in the whole process

异常识别&一键解锁 (选配)

Abnormal Recognition & One Button Unlocking (Optional)

异常状态短信告知，语音安抚轿内乘客，轿内一键解锁开启维保通道。

The abnormal status is informed by SMS, the passengers in the car are comforted by voice, and the maintenance channel is opened by one key unlocking in the car.

轿厢装潢

Car Decoration



XO-Z2608-积玉 XO-Z2608-JiYu

轿壁 XO-Z2608J:

前壁：白镜面不锈钢

左右侧壁：基础钢板轿壁+阳极氧化浅咖色乱纹铝板饰面

后壁：基础钢板轿壁+阳极氧化双色财富纹蚀刻铝饰面+铝合金踢脚线灯带

Car wall XO-Z2608J:

Front wall: white mirror stainless steel

Left and right side walls: basic steel car wall + anodized light coffee color random grain aluminum plate finish

Rear wall: basic steel car wall + anodized two-color fortune etched aluminum finish + aluminum alloy skirting line lamp strip

吊顶 XO-Z2608D(L):

喷粉钢板+铝合金边框+LED灯

Ceiling XO-Z2608D (L):

Powder sprayed steel plate + aluminum alloy frame + LED lamp

扶手 XO-Z2608F:

后侧：铝合金扶手+灯带

Handrail XO-Z2608F:


Rear side: aluminum alloy handrail + lamp strip

地坪 XO-Z2608P:

大理石纹理瓷砖（爱马仕灰）

Floor XO-Z2608P:

Marble textured ceramic tile (Hermes gray)

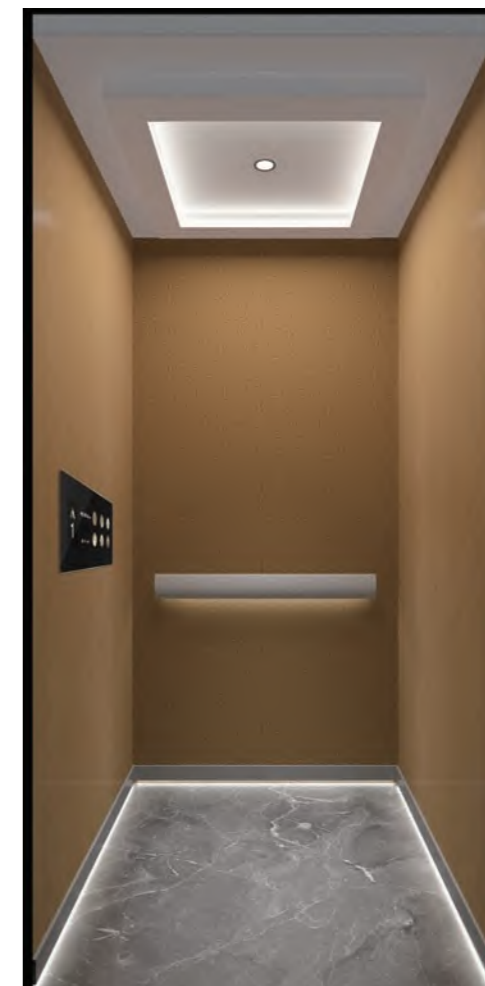

XO-Z2609-景云 XO-Z2609-JingYun

轿壁 XO-Z2609J:

前壁: 白镜面不锈钢

左右侧壁: 基础钢板轿壁+阳极氧化古铜色乱纹铝板饰面

后壁: 基础钢板轿壁+阳极氧化双色祥云纹蚀刻铝饰面+

铝合金踢脚线灯带

Car wall XO-Z2609J:

Front wall: white mirror stainless steel

Left and right side walls: basic steel car wall + anodized bronze random grain aluminum plate finish

Rear wall: basic steel car wall + anodized two-color auspicious cloud etching aluminum finish + aluminum alloy skirting line lamp strip

吊顶 XO-Z2608D(L):

喷粉钢板+铝合金边框+LED灯

Ceiling XO-Z2608D (L):

Powder sprayed steel plate + aluminum alloy frame + LED lamp

扶手 XO-Z2608F:

后侧: 铝合金扶手+灯带

Handrail XO-Z2608F:

Rear side: aluminum alloy handrail + lamp strip

地坪 XO-Z2608P:

大理石纹理瓷砖 (爱马仕灰)

Floor XO-Z2608P:

Marble textured ceramic tile (Hermes gray)

轿壁 XO-Z2609J:



可选

XO-G023-四季阳光 XO-G023-four Seasons Sunshine (optional)

上下罩 XO-G023Z:

玫瑰金镜面不锈钢
Upper and lower covers XO-G023Z:
Rose gold mirror stainless steel

轿壁 XO-G023J:

玫瑰金镜面不锈钢+透明夹胶玻璃
Car wall XO-G023J:
Rose gold mirror stainless steel + transparent laminated glass

吊顶 XO-G023D(L):

玫瑰金镜面不锈钢+金箔纸贴面+LED灯
Ceiling XO-G023D (L):
Rose gold mirror stainless steel + gold foil veneer + LED lamp

扶手 XO-G023F:

玫瑰金发纹不锈钢扁扶手
Handrail XO-G023F:
Rose blonde stainless steel flat handrail

地坪 XO-G023P:

大理石拼花
Floor XO-G023P:
Marble mosaic



XO-Z2111-和风雅意
XO-Z2111-Hefeng Yayi

可选

轿壁 XO-Z2111J:

前壁: 黑钛金镜面不锈钢

左右侧壁: 中间防火木饰面+黑钛金镜面不锈钢嵌条, 两侧黑钛金镜面不锈钢

后壁: 中间防火木饰面+黑钛金镜面不锈钢嵌条, 两侧防火木饰面

Car wall XO-Z2111:

Front wall: Black Titanium mirror stainless steel

Left and right side walls: middle fireproof wood finish + Black Titanium mirror stainless steel insert, black titanium mirror stainless steel on both sides

Rear wall: middle fireproof wood finish + Black Titanium mirror stainless steel insert, fireproof wood finish on both sides

吊顶 XO-Z0237D(L):


一体式面板灯

Ceiling XO-Z0237D (L):
 Integrated panel lamp


地坪 XO-Z2103P:

大理石 (金镶玉+金叶米黄)

Floor XO-Z2103P:
 Marble (gold inlaid jade + golden leaf Beige)

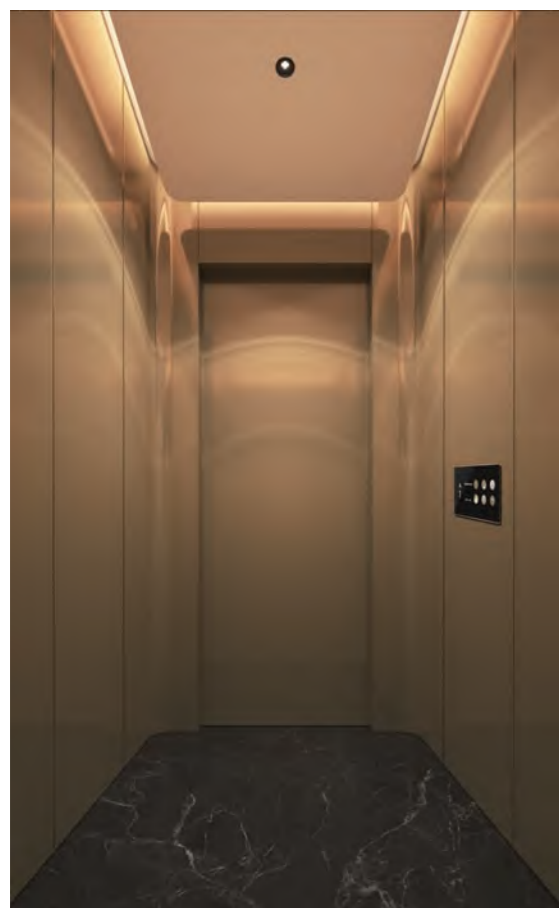

XO-Z2123
XO-Z2123 (optional)



可选

轿壁 XO-Z2123J:

香槟金抗指纹和纹不锈钢
Car wall XO-Z2123J:
Champagne gold fingerprint resistant and stainless steel

吊顶 XO-Z2121D(L):

喷粉钢板 (RAL7047) (边框材质) +LED灯
Ceiling XO-Z2121D (L):
Powder sprayed steel plate (ral7047) (frame material) + LED lamp

扶手 XO-Z2108F:

后侧: 玫瑰金发纹扁扶手
Handrail XO-Z2108F:
Rear side: Rose blond flat armrest

地坪 XO-Z2123P:

大理石(黑白根)
Floor XO-Z2123P:
Marble (black and white root)



XO-Z2125
XO-Z2125 (optional)



可选

轿壁 XO-Z2125J:

后壁: 中间云多拉灰大理石, 两边网格纹压花不锈钢
侧壁: 网格纹压花不锈钢
前壁: 网格纹压花不锈钢

Car wall XO-Z2125J:
Rear wall: gray as cloud marble in the middle, grid embossed stainless steel on both sides
Side wall: grid embossed stainless steel
Front wall: grid embossed stainless steel

吊顶 XO-Z2121D(L) :

网格纹压花不锈钢 (边框材质) +LED灯
Ceiling XO-Z2121D (L):
Grid embossed stainless steel (frame material) + LED lamp

地坪 XO-Z2121P:

大理石(云多拉灰)
Floor XO-Z2121P:
Marble (gray as cloud)



XO-Z2108-前程似锦

XO-Z2108-Qiancheng Sijin (optional)

可选

轿壁 XO-Z2108J:

前壁: 玫瑰金镜面不锈钢

左右侧壁: 中间压花不锈钢+两侧玫瑰金镜面不锈钢, 玫瑰金长发纹不锈钢嵌条+玫瑰金长发纹不锈钢踢脚线

后壁: 中间白洞石嵌玫瑰金镜面蚀刻+玫瑰金长发纹不锈钢嵌条+两侧玫瑰金镜面不锈钢+玫瑰金长发纹不锈钢踢脚线

Car wall XO-Z2108J:

Front wall: rose gold mirror stainless steel

Left and right side walls: Embossed stainless steel in the middle + rose gold mirror stainless steel on both sides, rose gold long hair pattern stainless steel insert strip + Rose Gold long hair pattern stainless steel skirting line

Back wall: white hole stone inlaid with rose gold mirror etching in the middle + stainless steel inlaid strip with rose long hair pattern + stainless steel inlaid with rose gold mirror on both sides + stainless steel skirting line with rose gold long hair pattern

吊顶 XO-Z2108D(L):

烤漆钢板+玫瑰金长发纹不锈钢+LED射灯+LED灯带

Ceiling XO-Z2108D (L):

Painted steel plate + Rose Gold long hair pattern stainless steel + LED spotlight + LED light strip

扶手 XO-Z2108F:

后侧: 玫瑰金发纹扁扶手

Handrail XO-Z2108F:


Rear side: Rose blond flat armrest

地坪 XO-Z2108P:

大理石拼花 (意大利灰+白洞石+铜条)

Floor XO-Z2108P:

Marble mosaic (Italian gray + white cave stone + copper strip)

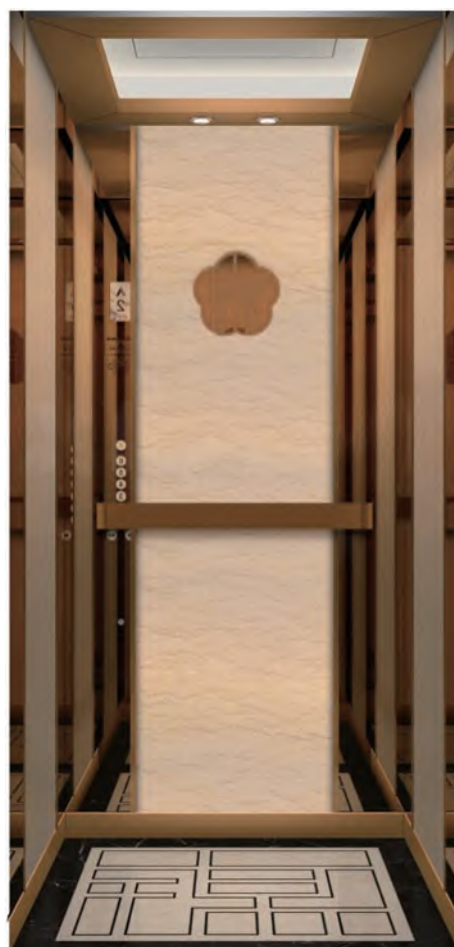

XO-Z2110-海阔天空

XO-Z2110-Haikuo Tiankong

可选

轿壁 XO-Z2110J:

前壁: 古铜抗指纹和纹不锈钢

左右侧壁: 中间白镜面不锈钢+古铜镜面不锈钢嵌条, 两侧抗古铜抗指纹和纹不锈钢

后壁: 中间古铜镜面不锈钢嵌条+皮革硬包, 两侧古铜抗指纹和纹不锈钢

Car wall XO-Z2110J:

Front wall: antique copper, fingerprint resistant and stainless steel

Left and right side walls: middle white mirror surface stainless steel + bronze mirror surface stainless steel inlay, both sides are anti bronze, anti fingerprint and stainless steel

Rear wall: bronze mirror stainless steel inlay in the middle + Leather hard bag, bronze anti fingerprint and stainless steel on both sides

吊顶 XO-Z2110D(L):

钢板烤漆+古铜镜面不锈钢嵌条+LED吸顶灯

Ceiling XO-Z2110D (L):

Steel plate baking paint + bronze mirror stainless steel strip + LED ceiling

扶手 XO-Z2110F:

后壁: 两端古铜和纹不锈钢, 中间深色皮革

Ceiling XO-Z2110D (L):

Steel plate baking paint + bronze mirror stainless steel strip + LED ceiling

地坪 XO-Z2110P:

大理石拼花 (金镶玉+水墨画)

Handrail XO-Z2110F:

Rear wall: bronze and stainless steel at both ends, dark leather in the middle



人机界面

Human Machine Interface



操纵箱

Operation panel



COP3-B操纵箱

标配
COP3-B Operation Panel (standard)

按钮型号: BR34E
面板材质: 亚克力
面板边框材质: 白镜面 / 钛金镜面
按钮材质: 白镜面 / 钛金镜面
显示器: 4.3" TFT-LCD
Button model: BR34E
Panel material: acrylic
Panel frame material: white mirror / titanium mirror
Button material: white mirror / titanium mirror
Display: 4.3" TFT-LCD



COP3操纵箱

可选
COP3-B Operation Panel (standard)

按钮型号: XSR-01
面板材质: 304发纹不锈钢
按钮材质: 高透光性亚克力
显示器: 4.3" TFT-LCD炫彩液晶显示
Button model: XSR-01
Panel material: 304 hairline stainless steel
Button material: high light transmittance acrylic
Display: 4.3" TFT-LCD colorful LCD display

召唤盒

Call



XHB17-A

标配
XHB17-A (standard)

按钮型号: BR34B
面板材质: 亚克力
显示器: 4.3" BND-LEDW
Standard configuration
Button model: BR34B
Panel material: acrylic
Display: 4.3" BND-LEDW



XHB17-BMINI

可选
XHB17-B MINI (standard)

按钮: BR36F
面板材质: 亚克力
显示器: 4.3" BOD-LEDW
Standard configuration
Button model: BR34F
Panel material: acrylic
Display: 4.3" BOD-LEDW



XHB40F

可选
XHB40F (standard)

按钮: BR40F
面板材质: 发纹不锈钢
optional
Button model: BR40F
Panel material: hairline stainless steel

基本功能

basic function

运行功能	Operation Function
停电自动应急疏散功能 Automatic emergency evacuation function after power failure	<ul style="list-style-type: none"> ● 电梯停电时，可自动切换到应急救援状态，就近楼层停靠，开门放人 In case of power failure, the elevator can automatically switch to the emergency rescue state, stop at the nearest floor, open the door and release people.
错误指令取消 Wrong Call Cancelling	<ul style="list-style-type: none"> ● 当电梯未运行时，可以通过连续双击该楼层的内召按钮，取消该已登记的信号 Wrong floor registration inside car can be cancelled by double click floor button before operation.
自动校正运行 Auto Correction	<ul style="list-style-type: none"> ● 当电梯失去位置时，电梯自动进行校正运行，找到电梯的正确位置 When elevator position is lost, elevator system will do automatic correction running to find the correct position
静态定位功能 Static Positioning	<ul style="list-style-type: none"> ● 电梯安装时，无需将钢带从主机上脱开进行主机角度定位，方便家内安装 When installing the elevator, there is no need to separate the steel belt from the host for the angle positioning of the host, which is convenient for installation at home.
检修零速停车 Zero Speed Stop for Inspection	<ul style="list-style-type: none"> ● 检修运行时，零速停车，提高主机抱闸的运行寿命 During inspection process, stop of car is of gradual and linear rather than instant, which improves the service lift of breaks.
开门保持时间智能调节 Open the door to keep time intelligent adjustment	<ul style="list-style-type: none"> ● 电梯系统按照轿内指令、厅外指令的不同自动对开门保持时间进行自动调整 The elevator system automatically adjusts the holding time of door opening according to the different instructions inside the car and outside the hall.
智能舒适运行 Intelligent Riding Comfort Curve	<ul style="list-style-type: none"> ● 控制系统根据不同目的层间距自动计算最优运行曲线，使电梯平稳舒适运行 The system calculates different floor space and figure out an optimized running curve to improve riding comfort.
按钮粘连自动识别 Call Button Adhesion Recognition	<ul style="list-style-type: none"> ● 控制系统可以自动识别出厅外召唤按钮的粘连或卡住情况，自动去除该粘连或卡住的召唤指令，避免电梯由于外召按钮的粘连或卡住情况而无法关门运行 In case hall call buttons are adhered or stuck, system could eliminate the call registration caused to avoid door not close

安全功能	Safety Function
端站保护 Terminal Protection	<ul style="list-style-type: none"> ● 当电梯行驶至终端楼层时，未降至系统设定的速度时，保护装置将强制减速，保证安全 When the elevator approach to the terminal floor without decelerate, the terminalprotection device will force deceleration to ensure safety.
故障自诊断 Self Diagnosis	<ul style="list-style-type: none"> ● 系统可以自动诊断并记录电梯的故障信号，使用专用工具可以迅速排除故障 The elevator system could record and diagnose faults automatically, and be cleared from faults quickly by the service tool.
关门力矩保护 Door Closing Torque Protection	<ul style="list-style-type: none"> ● 如轿厢门关闭时发生机械卡阻，当力矩超过预定值时，电梯门将重新打开 If mechanical jam occurs when door is close and the closing torque exceeds the pre-set value, door will re-open.
速度异常检测功能 Speed Detection	<ul style="list-style-type: none"> ● 系统通过对编码器反馈信号与系统给定速度进行比较,对电梯运行速度进行控制，一旦两者偏差超出系统允许的范围，系统进入保护，电梯停止运行 The elevator system control elevator speed by comparing encoder signals and system given speed, once the deviation exceed the allowable range, system will stop elevator running.
接触器异常检测功能 Contactor Detection	<ul style="list-style-type: none"> ● 系统根据接触器控制命令状态检测主接触器、抱闸接触器的反馈，如发现异常，系统进入保护，电梯停止运行 The elevator system detects main contactor, break contactor, once abnormal, the system will stop elevator running.
电网异常检测功能 Power Grid Detection	<ul style="list-style-type: none"> ● 电网波动幅度超过一定的安全范围，错相、缺相时，系统进入保护状态，电梯停止运行 Once fluctuation of power supply is out of range, or phase dislocation, phase loss is found, the system will stop elevator running.
光幕门保护 Light Curtain Door Protection	<ul style="list-style-type: none"> ● 在电梯入口形成光幕防护网，每一扫描循环内有154束红外线，反应时间少于0.1秒 Infra-red multi-beam light curtain is provided as a door protection means with more than 154 infra-red beams in each scanning cycle and reaction time is less than 0.1 sec.
抱闸异常检测功能 Break Detection	<ul style="list-style-type: none"> ● 当系统发出运行命令时，检测到抱闸未打开时；或者系统未发出运行命令，却检测到抱闸打开信号，电梯都将保护，不能运行 If break is found open when system is in running condition, or break is open while system is stop in stop condition, elevator systems will be protected and can not run.
安全救助功能 Safety Rescue Operation	<ul style="list-style-type: none"> ● 当电梯监测到异常时，在保证安全的前提下，进入安全救助运行模式，发出语音安抚和提示，并就近楼层停靠开门释放乘客，释放乘客后根据实际情况智能判断电梯是否可再运行 When any malfunction is found and elevator is still able to run, the elevator will come in safety rescue mode, delivery voice prompt message, go to the nearest floor, open door to evacuate passengers.
钢带滑动自检功能 Wire Rope Sliding Detection	<ul style="list-style-type: none"> ● 实时监测曳引钢带滑动相对位移量 Elevator system detects the sliding of wire ropes, in case of any sliding, system will stop the elevator and feedback an error.
控制系统温度监测 Controller Temperature Detection	<ul style="list-style-type: none"> ● 实时监测控制系统温度情况，在检测出有过温趋势时，提前转入安全救助模式运行，防止停梯困人 Elevator systems detects the temperature inside, when temperature trend is detected, the elevator will come in safety rescue mode to avoid passenger trapping.

应急功能	Emergency Function
云五方（无值班室） Cloud five party	<ul style="list-style-type: none"> ● 发生紧急情况，可通过对讲系统向外报警，如电话未接听，电梯可根据设定的号码自动转移至其他紧急联系电话 In case of emergency, the alarm can be sent out through the intercom system. If the phone is not answered, the elevator can automatically transfer to other emergency contact phones according to the set number
轿厢警铃 COP Alarm Button	<ul style="list-style-type: none"> ● 发生紧急情况，乘客可按动轿内操纵箱上报警按钮，向外报警 Alarm button is provided on the COP, in case of emergency, passengers could send out an alarm by pressing the alarm button.
机房紧急电动运行 Manual Running Operation	<ul style="list-style-type: none"> ● 控制柜内设有机房紧急电动运行装置，发生紧急情况时，可由专业人员进行操作 An electrical running device is provided inside controller, in case of emergency, specialized personnel could manually operate the lift to evacuation trapped passengers.
轿厢内应急照明 Emergency Lighting	<ul style="list-style-type: none"> ● 轿厢内设有应急照明装置 Emergency lighting device is provided inside elevator cabin.


节能功能	Energy Saving Function
轿厢照明风扇自动控制 Lighting & Fan Auto Control	<ul style="list-style-type: none"> ● 在规定时间内无呼梯信号，轿厢内照明及风扇会自动关闭以节约能源 If no calls within pre-set time, lighting and fan inside cabin will switch off automatically to save energy.
显示节能 Auto Screen Off	<ul style="list-style-type: none"> ● 当长时间没有呼梯信号显示屏将自动进入节能模式 If no calls within pre-set time, elevator indicators will screen off automatically to save energy.

人机界面	Interface
轿厢方向指示 Car direction indication	<ul style="list-style-type: none"> ● 在电梯运行时，轿内显示都会显示电梯的运行方向 When the elevator is running, the display in the car will display the running direction of the elevator.
轿内LCD显示 LCD display inside the car	<ul style="list-style-type: none"> ● 操纵箱配备液晶显示器，显示楼层及电梯运行方向等信息 The control box is equipped with LCD to display information such as floor and elevator running direction.
个性化楼层显示设置 Customized Floor Indication	<ul style="list-style-type: none"> ● 可以根据客户的需求，设置不同的楼层显示信息，该信息可设0-9，A-Z或者任意两个字符的组合，也可以是3位显示。 注：0与O，5与S，不能区分 Different floor display information can be set according to the needs of customers. The information can be set to 0-9, A-Z or any combination of two characters, or 3 digits. Note: 0 and O, 5 and S cannot be distinguished.


可选功能	Optional Features
三方对讲功能 Three party intercom	<ul style="list-style-type: none"> ● 轿厢、轿顶、机房之间的一个对讲系统 A intercom system between car, car roof and machine room.
开门待机 Door Open Standby	<ul style="list-style-type: none"> ● 改变普通电梯的关门待机功能，通过特殊处理使其开门待机，保持电梯内空气流通 When elevator is standby, door could be kept open by programming.
厅外防捣乱 Anti-Nuisance	<ul style="list-style-type: none"> ● 同时按下厅外召唤的上行和下行按钮时，只执行一次开关门，提升运行效率 When the up and down buttons called outside the hall are pressed at the same time, the door is opened and closed only once to improve the operation efficiency.
自动返回基站 Guard against disturbance outside the hall	<ul style="list-style-type: none"> ● 当轿厢在设定时间内无外呼和内选时，电梯将自动返回设定楼层（基站） When the car has no external call or internal selection within the set time, the elevator will automatically return to the set floor (base station).
厅外LCD显示 LCD display outside the hall	<ul style="list-style-type: none"> ● 厅外配备液晶显示器，显示楼层及电梯运行方向等信息 Liquid product display is equipped outside the hall to display information such as floor and elevator running direction.
双通门控制 Guard against disturbance outside the hall	<ul style="list-style-type: none"> ● 当电梯需要同时设置前门、后门时，可选择双通门控制，对前后两个门进行分别控制 When the elevator needs to set the front door and rear door at the same time, you can select the double-way door control to control the front and rear doors respectively.
到站预提醒 Arrival reminder	<ul style="list-style-type: none"> ● 根据自动计算的最优曲线，提前预告电梯下一个停靠楼层，其对应楼层按钮或显示器数字闪烁 According to the automatically calculated optimal curve, the next landing floor of the elevator is predicted in advance, and the corresponding floor button or display number flashes.
远程监控功能 Remote Monitoring System	<ul style="list-style-type: none"> ● 可通过互联网络实现远程监测中心对用户电梯的24小时全程监护，电梯发生故障或关人时，会自动向西奥400客服中心报警。 The 24-hour whole process monitoring of the user's elevator by the remote monitoring center can be realized through the Internet. When the elevator breaks down or closes, it will automatically alarm the theo 400 customer service center.

XO-SIND家用电梯 XO-SIND Home Elevator


对重侧置
counterweight side

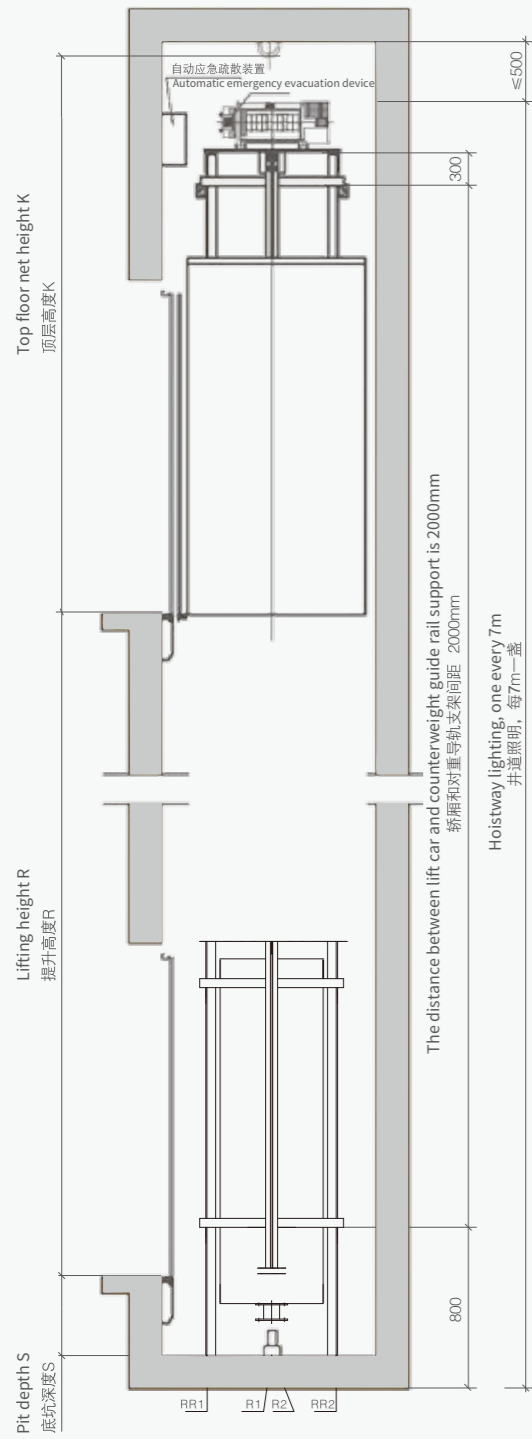


井道剖面图
Elevation

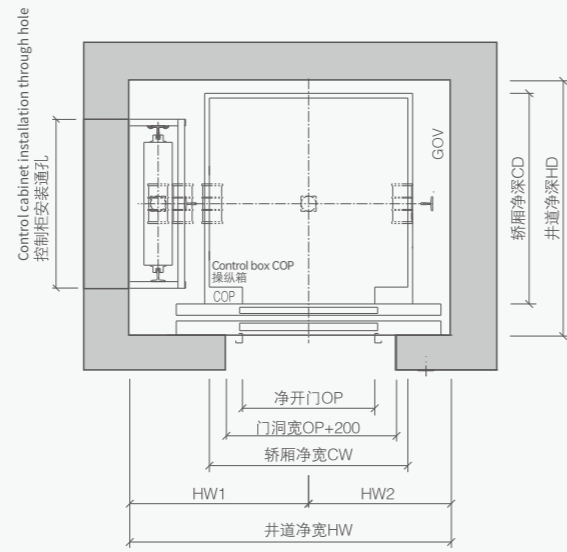


井道平面图
Hoistway plan

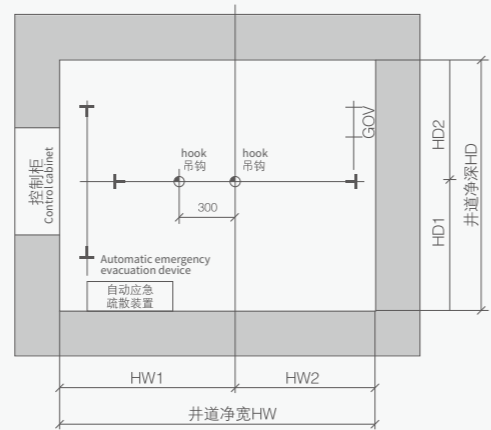

吊钩图
Hook detail

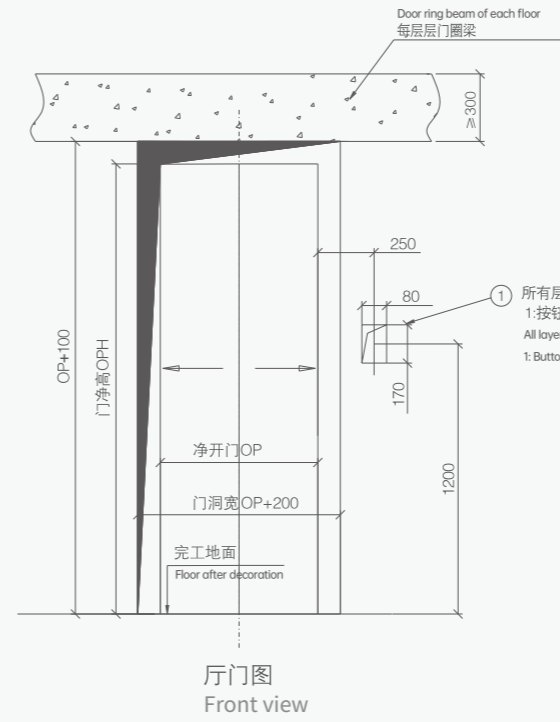

厅门图
Front view

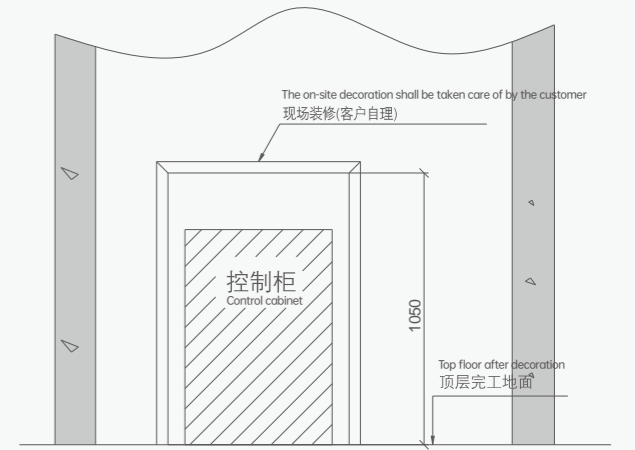

留孔尺寸客户自定, 用于摆放控制柜
The size of the reserved hole is determined by the customer, which is used to place the control cabinet

顶层控制柜放置示意图
Schematic diagram of top floor control cabinet placement

XO-SIND系列家用梯 (对重侧置) 参数表


Parameter table of XO-SIND household ladder (counterweight side)

载重 CAPACITY (kg)	速度 SPEED (m/s)	开门方式 Door opening mode	轿厢净尺寸(mm) 宽(CW)x深(CD)	开门净尺寸(mm) 宽(OP)x高(OPH)	井道净尺寸(mm) 宽(HW)x深(HD)	HW1 (mm)	HW2 (mm)	底坑深度 S(mm)	顶层高度K (轿底轮结构)		底坑反力(KN) REACTION		最大 提升高度 MAX. R (m)	最大层站 MAX. STOPS
									Top floor height (mm)	Top floor height (mm)	R1	R2		
400	0.4	中分	1100*1100	750*2000	1750*1430	971	779							
400	0.4	中分	1000*850	700*2000	1600*1200	896	704	350	3100	3500	50	50	18	6
400	0.4	旁开	800*850	650*2000	1400*1250	796	604							


XO-SIND家用电梯

XO-SIND Home Elevator


对重后置
counterweight side

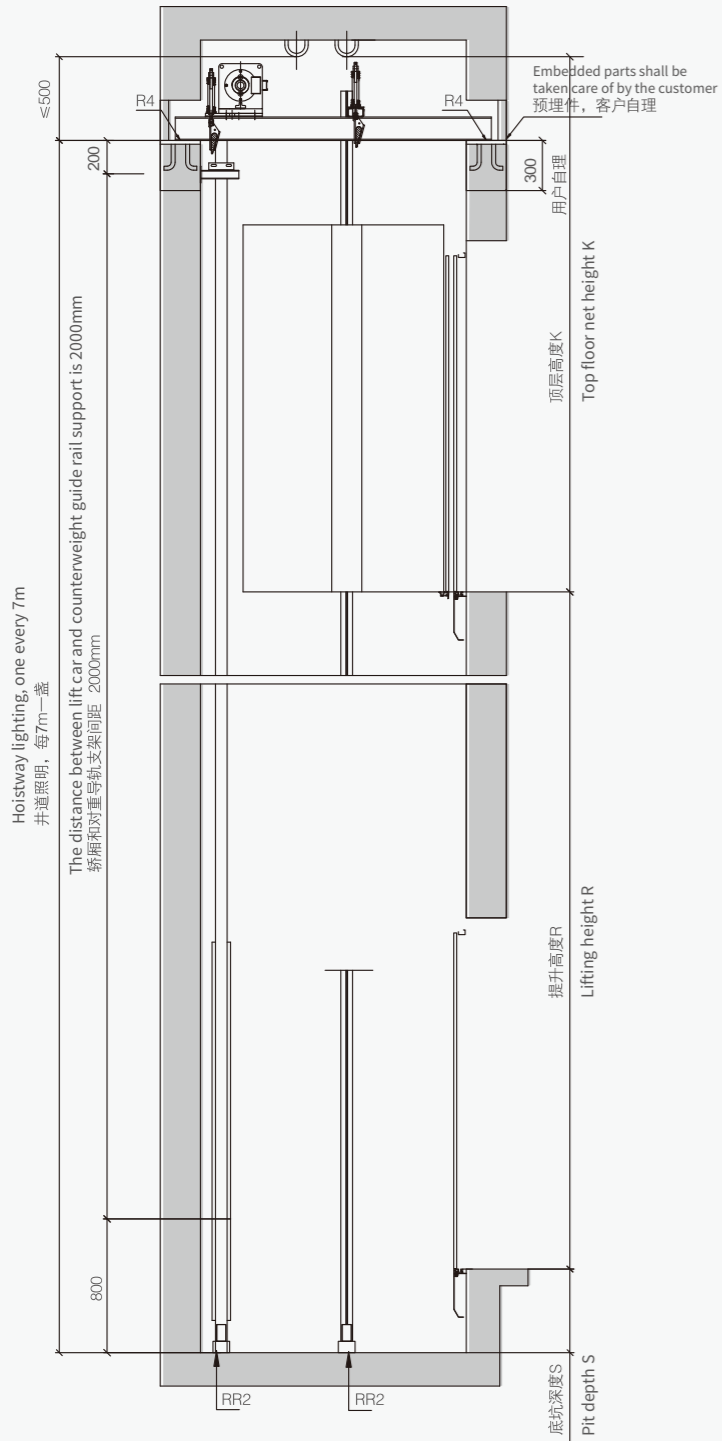


井道立面图
Elevation

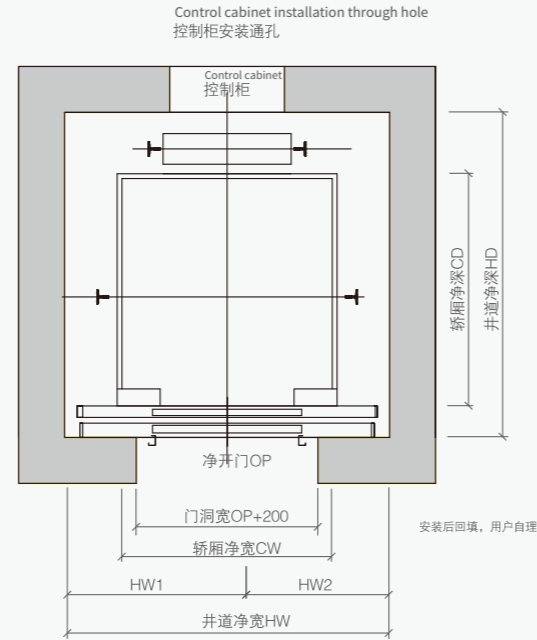


井道平面图
Hoistway plan

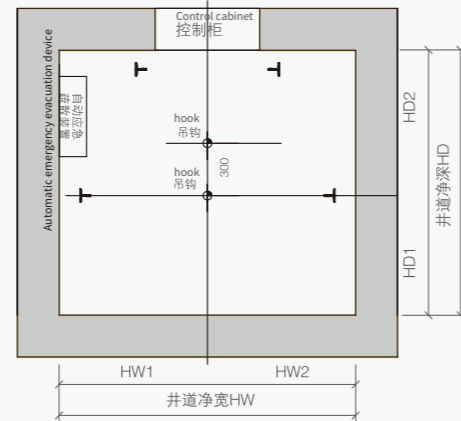

吊钩图
Hook detail

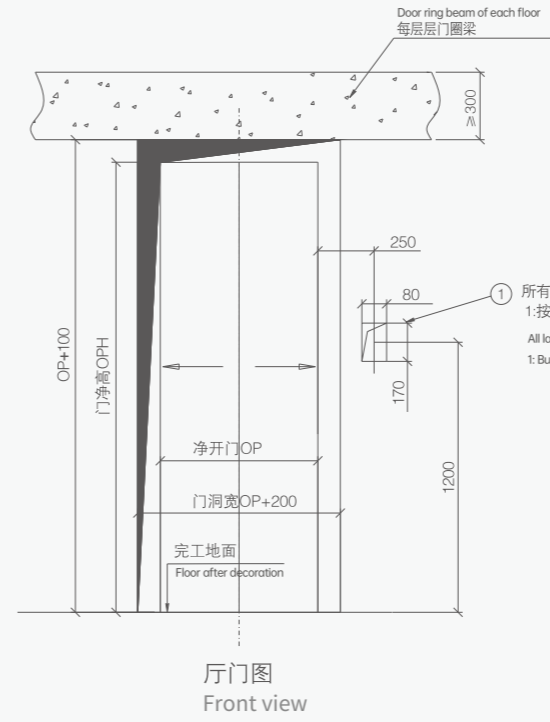

厅门图
Front view

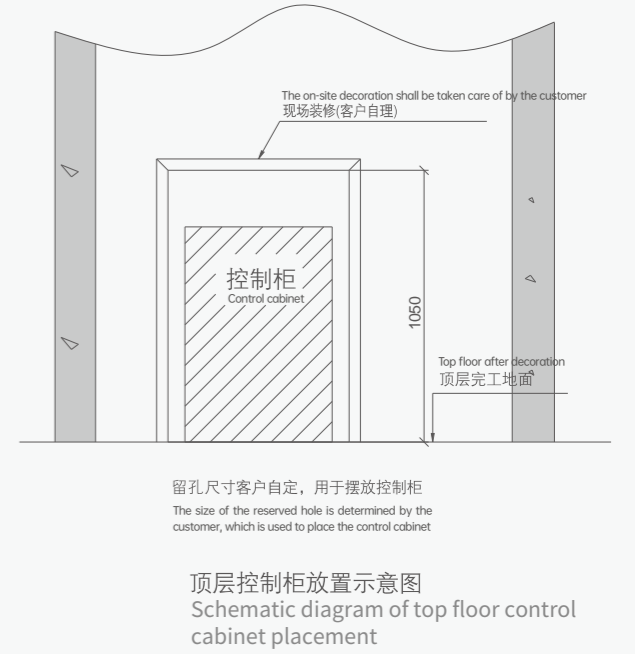

XO-SIND系列家用梯 (对重后置) 参数表

Parameter table of XO-SIND household ladder (counterweight side)

载重 CAPACITY (kg)	速度 SPEED (m/s)	开门方式 Door opening mode	轿厢净尺寸(mm) 宽(CW)x深(CD)	开门净尺寸(mm) 宽(OP)x高(OPH)	井道净尺寸(mm) 宽(HW)x深(HD)	HW1 (mm)	HW2 (mm)	底坑深度 S(mm)	顶层高度K (mm)	顶层高度(KN)		最大 提升高度 MAX. R (m)	最大层站 MAX. STOPS
										R1	R2		
400	0.4	中分	1100*1100	750*2000	1700*1700	850	850						
400	0.4	中分	1000*800	700*2000	1500*1350	750	750	350	3200	50	50	18	6
400	0.4	旁开	900*800	650*2000	1300*1400	650	650						

用户注意事项

- 家用电梯必须仅供单一家庭成员使用, 也可安装在非单一家庭使用的建筑物中, 但仅作为单一家庭进入其住所的工具。
- 当底坑底面下有人能达到的空间存在, 则对重缓冲器能安装在一直延伸到坚固地实心桩墩上, 或向电梯厂家询问安装对重安全钳。
- 图中标明的所有载荷, 除特别注明外都包含冲击修正量, 井道墙和底坑的强度必须能承受所示各力, 图中标明的用户自理(预埋钢板等), 需预先设置。
- 土建技术条件为电梯土建布置的重要组成部分, 必须严格遵守。
- 如土建未按本条款及布置图施工, 由用户负责整改, 由此而造成的后果均由用户承担。
- 井道尺寸如有变更, 请及时以书面形式通知我公司, 且要得到我公司认可方能更改。
- 电梯井道包括井道壁、底板和井道顶板。电梯井道为电梯专用, 井道(含井道壁、底板和顶板)内不得装设与电梯无关的设备、电缆等。

User precautions

- Household elevators must only be used by single family members, and can also be installed in buildings not used by single families, but only as a tool for single families to enter their homes.
- When there is a space that can be reached by personnel under the bottom surface of the bottom pit, the counterweight buffer can be installed on the solid pile pier extending all the way, or ask the elevator manufacturer to install counterweight safety gear.
- Unless otherwise specified, all loads indicated in the drawing include impact correction. The strength of hoistway wall and pit must be able to withstand all forces shown. The users indicated in the drawing shall take care of themselves (embedded steel plate, etc.) and need to be set in advance.
- Civil engineering technical conditions are an important part of elevator civil engineering layout and must be strictly observed.
- If the earth building is not constructed in accordance with this clause and the layout, the user shall be responsible for rectification, and the consequences arising therefrom shall be borne by the user.
- In case of any change in hoistway size, please inform our company in writing in time, and the change can only be made after being approved by our company.
- The elevator shaft includes shaft wall, bottom plate and shaft top plate. The elevator shaft is dedicated to the elevator, and equipment cables irrelevant to the elevator shall not be installed in the parallel shaft (including shaft wall, bottom plate and top plate).